CA6000D



Single drum vibratory rollers

Part of the Atlas Copco Group



Technical data

Masses	
Max. operating mass	19,800 kg
Operating mass (incl. ROPS)	19,300 kg
Operating mass (incl. Cab)	19,450 kg
Module mass (front/rear)	12,850/6,600 kg

Traction	
Speed range	4/6/7/11
Vertical oscillation	±9°
Tyre size (12 ply)	23,1 x 26
Theor. gradeability	56 %

₩.	Compaction	
	Static linear load	60 kg/cm
	Nominal amplitude (high/low)	2.1/0.8 mm
	Vibration frequency (high/low amplitude)	29/30 Hz
	Centrifugal force (high/low amplitude)	360/150 kN

Hydraulic system	
Driving	Hydrostatic
Vibration	Hydrostatic
Steering	Hydrostatic
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

Engine		
Manufacturer/Model	Deutz TCD6,1L6 (IIIB/4i)	
Туре	Water cooled turbo diesel	
Rated power, ISO 14396	150 kW (204 hp) @ 2,200 rpm	
Fuel tank capacity	272	

Engine		
Manufacturer/Model	Deutz TCD2012L06 (IIIA/3)	
Туре	Water cooled turbo diesel	
Rated power, ISO 14396	150 kW (204 hp) @ 2,200 rpm	


CA6000D




Single drum vibratory rollers

Part of the Atlas Copco Group

Technical data

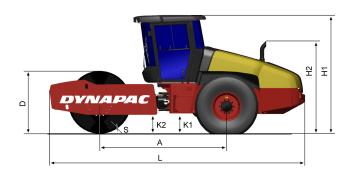

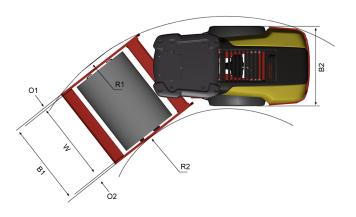

Dimensions	
A. Wheelbase	3,100 mm
B1. Width, front	2,340 mm
B2. Width, rear	2,130 mm
D. Drum diameter	1,546 mm
H1. Height, with ROPS/cab	2,890 mm
H2. Height, w/o ROPS/cab	2,130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L. Length	6,240 mm
O1. Overhang, right	105 mm
O2. Overhang, left	105 mm
R1. Turning radius, outside	5,800 mm
R2. Turning radius, inside	3,300 mm
S. Drum shell thickness	48 mm
W. Drum width	2,130 mm